Dawlish

Case Study: 07.03.2023










Universal Group were contracted by Morgan Sindall to deliver piled foundations adjacaent to Parsons Tunnel, Dawlish.

Our Piling team worked with our project partners Morgan Sindall to deliver the piled foundations, for a new rockfall shelter adjacent to Parsons Tunnel, Dawlish.

We were contracted to deliver/install:

- 86nr 450mm diameter SFA piles to depths of upto 14.5m, complete with full length reinforcements & integral columns.
- All works were carried out under ALO & possession conditions.



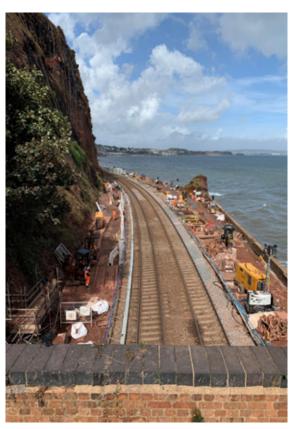

Universal Group 1st Floor, Ashbrook House Forest Street, Sutton in Ashfield, Nottinghamshire NG17 1BE

Reg03728536, VAT990830888



